

MODEL NUMBER

ADC-AC-LP1502

SPECIFICATIONS

INPUT POWER

12 to 24 VDC, 500 mA max

OUTPUT POWER

300 mA max each reader

INPUTS

Two dedicated reader inputs
One two-wire RS-485 input
Eight programmable inputs
One dedicated tamper input

OUTPUTS

Four relay outputs: 5 A (NO) and
3 A (NC) @ 30 VDC
Single-wire LED control
Single-wire Buzzer output

CERTIFICATIONS

CE compliant
UL 294 recognized
RoHS
FCC Part 15 Class A
NIST certified encryption

DIMENSIONS


8 x 6 x 1" (203.2 x 152.4 x 25 mm)

TEMPERATURE

32 – 158°F (0 – 70°C) operational
-67 – 185°F (-55 – 85°C) storage

OPERATING HUMIDITY

5-95% (non-condensing) RH

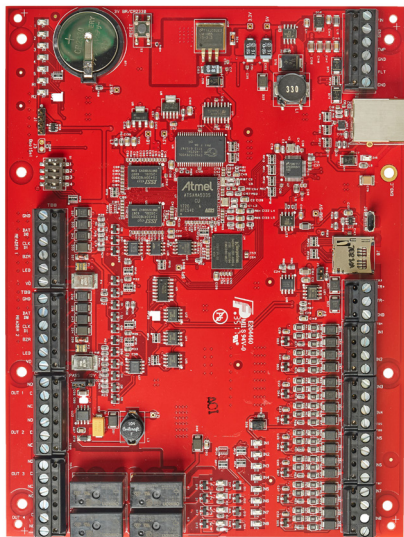

LP1502 Door Controller

Alarm.com's Smarter Access Control is an ideal solution for any small or medium sized business. Each LP1502 Door Controller can support up to two readers and can manage 34 readers using Alarm.com Expansion Modules. Designed for high-traffic business environments, the LP1502 Door Controller can manage large numbers of users with complicated access schedules.

For large installations, multiple controllers can be installed on a single account.

Controller Features

- 12 to 24 VDC input power
- Two dedicated reader inputs
- Support for sixteen expansion modules and up to 34 readers
- Four relay outputs
- Eight programmable inputs

Smarter Access Control Benefits

- Scan-to-add card format and serial detection
- Control doors and manage users from the Alarm.com app
- Integrated Alarm.com intrusion and video offerings
- User-friendly, flexible scheduling
- Configure hardware using web or app for easy installation
- Plug & play installation — no networking expertise required



Developed with the Authentic Mercury
open hardware platform